

PCB Terminal Blocks

KLS2-360-7.50 PCB Terminal block 7.5mm Pitch

Electrical :


Rated voltage: 300V
 Rated current: 16A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC15000V/1Min
 Wire range: 22-14AWG 2.5mm²

Material:

Screws: M3 steel Zinc plated
 Wire guard: phosphor bronze Ni plated or stainless steel
 Pin header: Brass, Tin plated
 Housing: PBT,UL94V-0

Mechanical:

Temp. Range: -30°C~+120°C
 MAX Soldering:+250°C for 5 Sec.
 Torque: 0.5Nm (4.5lb.in)
 Strip length: 4.5-5mm

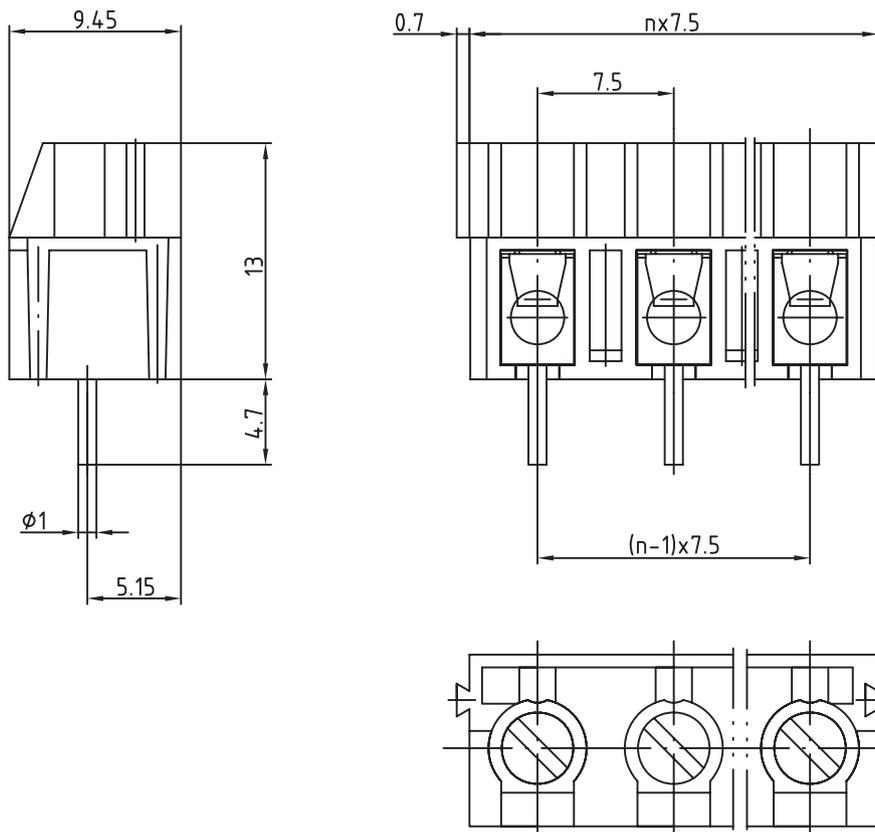

ORDER INFORMATION

Product NO.: KLS2-360-7.50-03P-3S

Pos. NO. _____ S=Slot Screw
 Series No. _____ Color: 2=Blue, 3=Black
 Pitch 7.50=7.50mm _____ Pin Number:02/03 Pin